


Finishes Zinc Plated

Materials Carbon Steel,

Recommended The extension piece, when installed in the hanger assembly, allows for movement up to 20°. Threading at both ends is 3/8"-16 for use with standard threaded rod or hardware.

Height adjustable with an inspection hole in collar to check the screw in depth of the threaded rod. Assemblies will hang "plumb" from the pivot point or, where movement is required, the hanging assembly will accommodate.

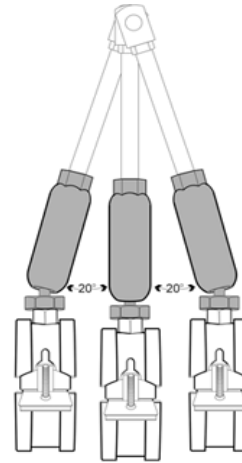

SIZE	BOX QTY.	APPROX. WT. Per 100 PCS	MAX LOAD
3/8"	25	9	600#

QWI 4.3.1 Issue Date Nov/21 Rev.3