


#43 Swivel Ring Hanger

Finishes Black Powder Epoxy Coating c/w Zinc Insert Nut

Materials Carbon Steel

Approvals Complies with MSS SP-58 & SP-69 (Type 10).

Recommended for the suspension of stationary non-insulated copper or iron pipe lines allowing for vertical adjustment.

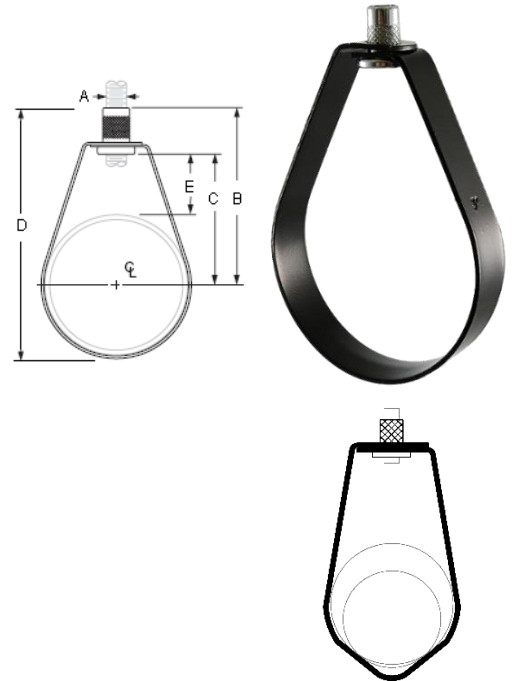

* 1" & 1 1/4" Copper Tube Size Profile

COPPER TUBE SIZE	ALSO ACCOMMODATES IPS SIZE	SPECIFICATION DATA					REC. MAX. LOAD (LBS.)	APP'X WT. PER 100 (LBS)	PC'S PER PKG.
		A	B	C	D	E			
1/2 - 3/4	1/2	3/8	2 13/16	1 15/16	3 1/4	1 5/16	400	9	100
* 1	3/4 - 1	3/8	2 11/16	1 13/16	3 3/8	1 1/4	400	9	100
* 1 1/4	3/4 - 1	3/8	2 1/2	1 5/8	3 3/8	15/16	400	9	100
1 1/2	1 1/4	3/8	2 15/16	2 1/16	3 3/4	1 3/16	400	10	100
2	2	3/8	3 7/16	2 9/16	4 9/16	1 3/8	400	12	100
2 1/2	2 1/2	3/8	3 11/16	2 13/16	5 1/16	1 3/8	650	28	50
3	3	3/8	4	3 1/8	5 5/8	1 3/8	650	30	50
4	4	3/8	4 5/8	3 3/4	6 7/8	1 1/2	650	37	25
5	5	1/2	5 3/4	4 3/4	8 1/2	1 15/16	1000	83	20
6	6	1/2	6 5/8	5 9/16	9 7/8	2 1/4	1250	95	15
8	8	1/2	7 3/4	6 11/16	12 1/16	2 3/8	1250	118	10

QWI 4.3.1 Issue Date Nov/21 Rev.12

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorwalraven.ca

For more information, please contact Customer Service at 1-800-263-8652