

#450 Heavy Beam Clamp

Finishes Bare metal, Hot Dip galvanized

Materials ASTM A-36 carbon steel
Stainless Steel 304SS & 316SS (Sizes 3 to 6)

Approvals Complies with MSS SP-58 and SP-69
(Type 28 without links, Type 29 with links.)


Recommended 3" through 16"

Flange Width Designed for suspension of heavy loads from beams up to 16" wide and up to 1" thick.


Specify clamp size, figure number, rod size and finish.



Without Links
Sizes 1, 3, and 5

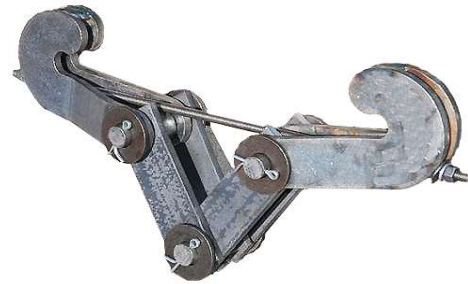

With Links
Sizes 2, 4, and 6

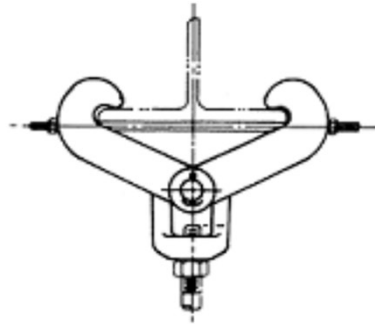

SIZE	FLANGE SIZE		MAX ROD	WGT. EACH (LBS)	MAX LOAD
	WIDTH	MAX THICKNESS			
1	3 - 8	5/8	3/4	8	3230
2	7 - 15*	5/8	3/4	12	3230
3	3 - 8	3/4	1	11	5900
4	7 - 15*	3/4	1	16	5900
5	5 - 9	1	1 1/2	30	13800
6	8 - 16*	1	1 1/2	48	13800

* Supplied with links

QWI 4.3.1 Issue Date Jul/26 Rev.13