

**Finishes** Hot Dipped Galvanized, except for Stainless Steel Screws


**Materials** Carbon steel assembly with stainless steel set screws.  
Stainless Steel 316SS up to 12"

**Approvals** Complies with MSS SP-58 and SP-69 (Type 36, 38).


**Recommended** Designed to support pipe horizontally. Straight cut pipe thread on nipple provides up to 4 1/2" of vertical adjustability.

**Notes** Saddles accommodate ductile iron pipe and IPS.  
Support requires 2" Schedule 40 (for 2" - 12") or 3" Schedule 40 (for 14" - 16") extension pipe to be cut in the field.

\*\*Factory tested 11,000 lbs (for the saddle portion **only**)\*\*

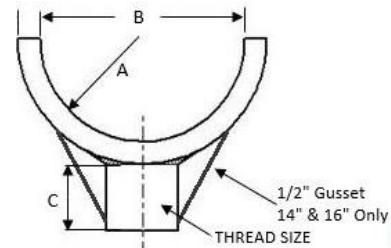

IPS or Ductile Iron Pipe Size	SPECIFICATION DATA			
	A	B	C	THREAD SIZE
2	1.750"	3.500"	1 1/2	1 1/4 - 7
3	2.030"	4.060"	1 1/2	1 1/4 - 7
4	2.450"	4.900"	1 1/2	1 1/4 - 7
6	3.500"	7.000"	1 1/2	1 1/4 - 7
8	4.580"	9.160"	1 1/2	1 1/4 - 7
10	5.600"	11.200"	1 1/2	1 1/4 - 7
12	6.650"	13.300"	1 1/2	1 1/4 - 7
14	7.750"	15.500"	3	2 1/2 - 4
16	8.800"	17.600"	3	2 1/2 - 4

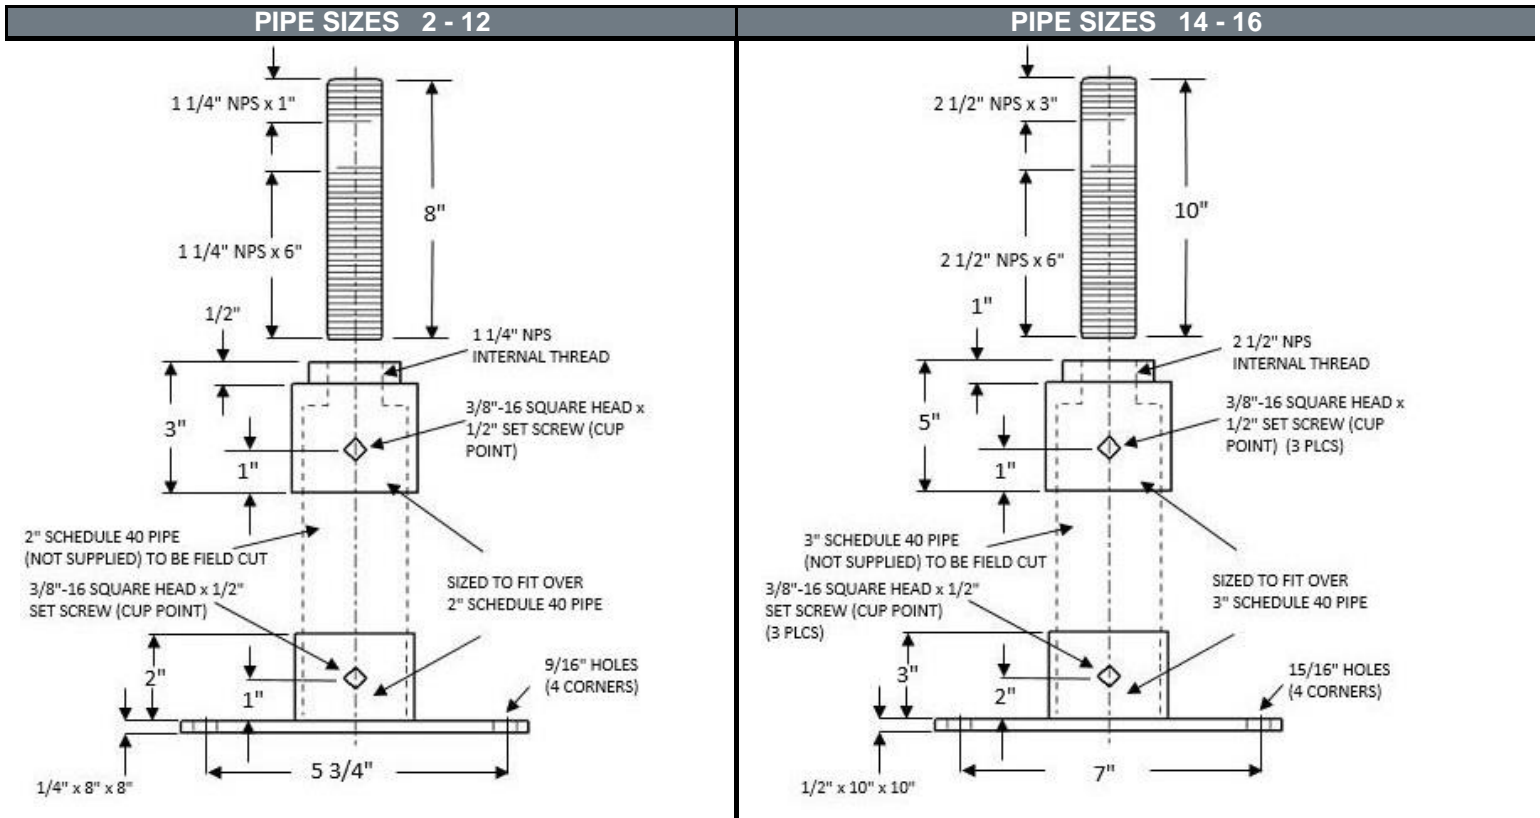

QWI 4.3.1 Issue Date Dec/23 Rev.12

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at [www.taylorwalraven.ca](http://www.taylorwalraven.ca)

For more information, please contact Customer Service at 1-800-263-8652