

#65 Eye Socket

Finishes Bare Metal, Zinc Plated


Materials Ductile Iron

Approvals Complies with MSS SP-58 and SP-69 (Type 16).

Recommended A non-adjustable threaded rod attachment often used with the split ring hanger Fig. # 38R

Maximum temperature: 450°F

** Based on recommended maximum load for 1/4" threaded rod*

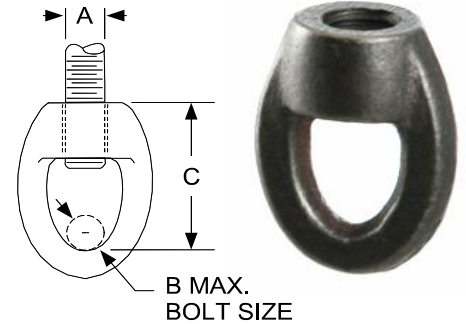

ROD SIZE A	SPECIFICATION DATA			RECOM. MAX. LOAD (LBS)	APP'X WT. PER 100 (LBS)	PIECES PER PACKAGE
	IRON PIPE SIZE	B	C			
1/4	3/8	1/4	1 11/32	230 *	5	100
3/8	1/2 - 2	1/4	1 11/32	610	7	100
1/2	2 1/2 - 3 1/2	1/4	1 17/32	1000	13	100
5/8	4 - 5	3/8	1 13/16	1400	19	50
3/4	6	1/2	2 5/32	2200	31	50
7/8	8	1/2	2 11/32	2300	44	50

QWI 4.3.1 Issue Date Nov/21 Rev.10

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorwalraven.ca

For more information, please contact Customer Service at 1-800-263-8652