

#71 Protection Saddle 1 1/2" Insulation

Finishes Bare Metal, Zinc Plated, Hot Dipped Galvanized


Materials Carbon Steel, Stainless Steel 304SS

Approvals Complies with MSS SP-58 and MSS SP-69 (Type 39)

Recommended Designed to protect pipe insulation from crushing, typically used on high temperature pipe lines.

Maximum temperatures: Carbon Steel 650°F, Alloy 950°F

Notes All saddles 12" in length.
Center rib starts at 12" IP

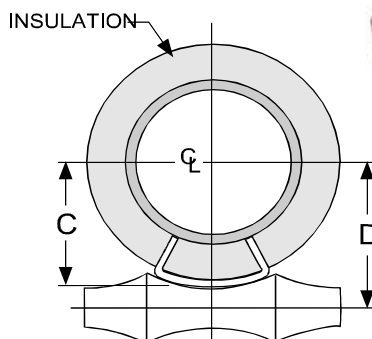

IRON PIPE SIZE	SPECIFICATION DATA				ACTUAL THICKNESS OF COVERING	RECOM. MAX. LOAD (LBS.)	APP'X WT. PER 100 (LBS.)
	C	D	HANGER ROLLER SIZE				
			# 94/95	# 93			
3/4	2 1/8	2 5/8	3	3 1/2	1 7/16	1200	199
1	2 7/16	2 15/16	3	4	1 9/16	1200	199
1 1/4	2 9/16	3 1/8	3 1/2	5	1 11/16	1200	199
1 1/2	2 11/16	3 1/4	3 1/2	5	1 9/16	1200	199
2	2 7/8	3 1/2	4	5	1 9/16	1200	220
2 1/2	3 3/4	4 1/8	5	6	1 7/8	1200	220
3	3 1/2	4 3/16	5	6	1 9/16	1200	220
3 1/2	4	4 11/16	6	8	1 13/16	1800	241
4	3 3/32	4 11/16	6	8	1 9/16	1800	241
5	4 1/2	5 5/16	8	8	1 13/16	1800	241
6	5 1/16	5 7/8	8	10	1 1/2	1800	458
8	6	7 1/8	10	12	1 1/2	1800	586
10	7 1/4	8 5/16	12	14	1 9/16	1800	586
12	8 1/16	9 5/8	14	16	1 9/16	5000	830
14	8 7/8	10 3/16	16	18	1 7/16	5000	830
16	9 7/8	11 3/8	18	20	1 1/2	5000	926
18	10 7/8	12 1/2	20	--	1 1/2	5000	990
20	11 3/4	13 11/16	24	--	1 1/2	7200	1054

Shaded rows indicate common saddle size.

QWI 4.3.1 Issue Date May/25 Rev.10

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorwalraven.ca

For more information, please contact Customer Service at 1-800-263-8652