

#73 Protection Saddle 2 1/2" Insulation

Finishes Bare Metal, Zinc Plated, Hot Dipped Galvanized


Materials Carbon Steel, Stainless Steel 304SS

Approvals Complies with MSS SP-58 and MSS SP-69 (Type 39)

Recommended Designed to protect pipe insulation from crushing, typically used on high temperature pipe lines.

Maximum temperatures: Carbon Steel 650°F, Alloy 950°F

Notes All saddles 12" in length.
Center rib starts at 12" IP

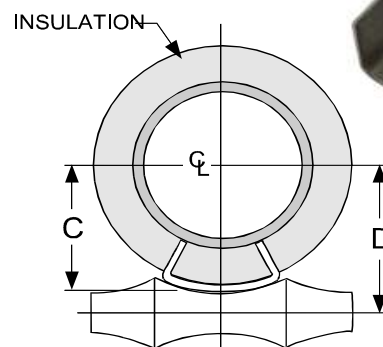

IRON PIPE SIZE	SPECIFICATION DATA				ACTUAL THICKNESS OF COVERING	RECOM. MAX. LOAD (LBS.)	APP'X WT. PER 100 (LBS.)
	C	D	HANGER ROLLER SIZE				
			# 94/95	# 93			
3/4	2 5/8	3 1/4	3 1/2	3 1/2	2 3/4	1200	310
1	2 13/16	3 3/8	4	4	2 5/8	1200	310
1 1/4	3 13/16	4 5/8	6	8	2 1/2	1800	326
2	3 15/16	4 3/4	6	8	2 5/8	1800	326
2 1/2	4 7/16	5 1/4	8	8	2 7/8	1800	348
3	4 11/16	5 3/8	8	8	2 9/16	1800	348
3 1/2	4 13/16	5 3/4	8	10	2 13/16	1800	369
4	5 1/8	6 1/16	8	10	2 9/16	1800	369
5	5 9/16	6 1/2	10	12	2 7/8	1800	369
6	6 1/16	7 1/16	10	12	2 1/2	1800	618
8	7 1/4	8 5/16	12	14	2 5/8	1800	682
10	8 3/16	9 5/8	14	16	2 9/16	1800	714
12	9 1/8	10 11/16	16	18	2 9/16	5000	1102
14	9 3/4	11 5/16	18	20	2 7/16	5000	1102
16	10 7/8	12 7/16	20	--	2 1/2	7200	1181
18	12	13 15/16	24	--	2 1/2	7200	1245
20	12 7/8	14 13/16	24	--	2 1/2	7200	1309

Shaded rows indicate common saddle size.

QWI 4.3.1 Issue Date May/25 Rev.10

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorwalraven.ca

For more information, please contact Customer Service at 1-800-263-8652