

#74 Protection Saddle 3" Insulation

Finishes Bare Metal, Zinc Plated, Hot Dipped Galvanized


Materials Carbon Steel, Stainless Steel 304SS

Approvals Complies with MSS SP-58 and MSS SP-69 (Type 39)

Recommended Designed to protect pipe insulation from crushing, typically used on high temperature pipe lines.

Maximum temperatures: Carbon Steel 650°F, Alloy 950°F

Notes All saddles 12" in length.
Center rib starts at 12" IP

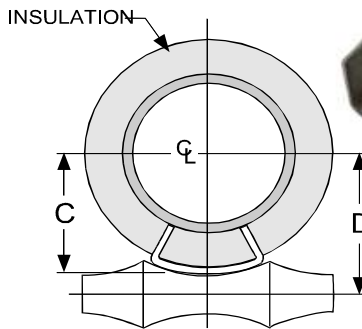

IRON PIPE SIZE	SPECIFICATION DATA				ACTUAL THICKNESS OF COVERING	RECOM. MAX. LOAD (LBS.)	APP'X WT. PER 100 (LBS.)
	C	D	HANGER ROLLER SIZE				
			# 94/95	# 93			
2	4 11/16	5 1/2	8	8	3 1/8	1800	390
2 1/2	4 15/16	5 3/4	8	10	3 3/8	1800	390
3	5	5 15/16	10	10	3 1/16	1800	433
3 1/2	5 1/2	6 7/16	10	10	3 3/8	1800	433
4	5 9/16	6 1/2	10	10	3 1/8	1800	433
5	6 1/8	7 1/16	10	12	3 3/8	1800	433
6	6 9/16	7 5/8	12	12	3	1800	809
8	7 5/8	9 1/8	14	16	3 1/8	1800	809
10	8 7/8	10 1/4	16	18	3 1/16	1800	873
12	9 11/16	11 5/16	18	20	3 1/16	5000	1229
14	10 1/4	11 7/8	18	20	2 15/16	5000	1229
16	11 3/16	13 1/8	24	--	3	7200	1309
18	12 5/16	14 1/4	24	--	3	7200	1373
20	13 1/2	15 1/2	24	--	3	7200	1437

Shaded rows indicate common saddle size.

QWI 4.3.1 Issue Date May/25 Rev.10

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorwalraven.ca

For more information, please contact Customer Service at 1-800-263-8652