

#76 Protection Saddle

3 1/2" Insulation

Finishes Bare Metal, Zinc Plated, Hot Dipped Galvanized


Materials Carbon Steel, Stainless Steel 304SS

Approvals Complies with MSS SP-58 and MSS SP-69 (Type 39)

Recommended Designed to protect pipe insulation from crushing, typically used on high temperature pipe lines.

Maximum temperatures: Carbon Steel 650°F, Alloy 950°F

Notes All saddles 12" in length.
Center rib starts at 12" IP

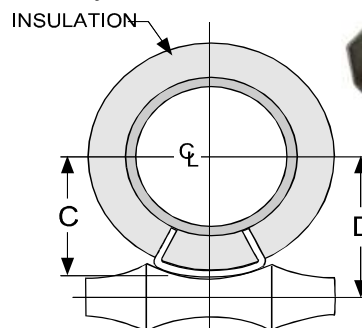

IRON PIPE SIZE	SPECIFICATION DATA				ACTUAL THICKNESS OF COVERING	RECOM. MAX. LOAD (LBS.)	APP'X WT. PER 100 (LBS.)
	C	D	HANGER ROLLER SIZE				
			# 94/95	# 93			
2	5 3/16	6	8	10	3 5/8	1800	432
2 1/2	4 7/16	6 1/4	8	10	3 15/16	1800	432
3	5 1/2	6 7/16	10	10	3 5/8	1800	475
3 1/2	6	6 13/16	10	12	3 7/8	1800	475
4	6 1/16	7	10	12	3 5/8	1800	475
5	6 5/8	7 9/16	12	12	3 9/16	1800	475
6	7 1/16	8 1/8	12	14	3 5/8	1800	873
8	8 1/8	9 5/8	14	16	3 5/8	1800	873
10	9 3/8	10 3/4	16	18	3 9/16	1800	937
12	10 3/16	11 13/16	18	20	3 9/16	5000	1325
14	10 3/4	12 3/8	20	24	3 7/16	5000	1325
16	11 11/16	13 5/8	24	--	3 1/2	7200	1405
18	12 13/16	14 3/4	24	--	3 1/2	7200	1469
20	14	16	30	--	3 1/2	7200	1533

Shaded rows indicate common saddle size.

QWI 4.3.1 Issue Date May/25 Rev.4

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorwalraven.ca

For more information, please contact Customer Service at 1-800-263-8652