

Finishes Bare Metal, Zinc Plated (up to 12"), Hot-Dip Galvanized


Materials Carbon Steel, Stainless Steel 304SS & 316SS

Approvals Complies with MSS SP-58 and SP-69 (Type 42).

Recommended For the support and stabilizing of vertical pipe runs.

*Maximum temperatures: Galvanized 450°F, 650°F (CS),
950°F (A) and 1000°F (SS)*

Notes Shear lugs included

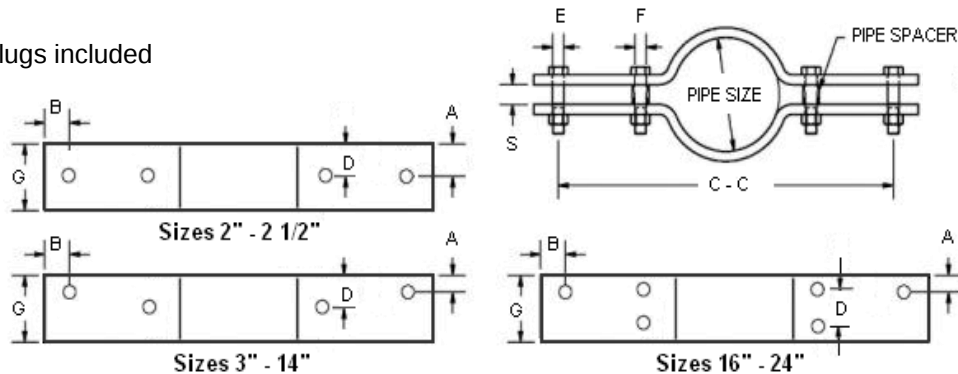

IRON PIPE SIZE	SPECIFICATION DATA								APP'X WT. EACH (LBS)	MAX. REC. LBS.
	C-C	E	F	G	S	A	D	B		
2	18	1/2	1/2	2 1/2	3/4	1 1/4	1 1/4	2	18	900
2 1/2	20	1/2	1/2	2 1/2	3/4	1 1/4	1 1/4	2	19	900
3	20	5/8	5/8	3	1	1 1/4	1 1/2	2	29	1500
4	22	3/4	3/4	4	1 1/4	1 1/4	2	2	50	2200
5	22	3/4	3/4	4	1 1/4	1 1/4	2	2	51	2200
6	24	7/8	7/8	5	1 1/2	1 1/4	2 1/2	2	70	3000
8	27	7/8	7/8	5	1 1/2	1 1/4	2 1/2	2	78	3000
10	30	1 1/4	1 1/4	6	2 1/4	1 5/8	3	3	150	5500
12	32	1 1/2	1 1/2	7	2 1/2	1 7/8	3 1/2	3	193	7800
14	34	1 1/2	1 1/2	7	2 1/2	1 7/8	3 1/2	3	204	7800
16	36	1 1/2	1 1/8	8	2 1/2	2	3	3	224	9000
18	39	1 1/2	1 1/8	8	2 1/2	2	3	3	280	9000
20	42	2	1 1/2	8	3 1/2	2 5/8	4	4 1/4	429	13500
24	45	2	1 1/2	8	3 1/2	2 5/8	4	4 1/4	465	13500

QWI 4.3.1 Issue Date Feb/25 Rev.8

Pipe Size	Shear Lug	Lugs Req'd
2 - 2 1/2	1/2 x 1/2 x 3	2
3	5/8 x 5/8 x 3	2
4 - 8	3/4 x 3/4 x 3	2
10 -14	1 x 1 x 3	4
16 -24	1 1/4 x 1 1/4 x 3	4

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorwalraven.ca

For more information, please contact Customer Service at 1-800-263-8652