

BISMAT® 5000 Rubber Lined Clamp

Finishes Zinc Plated, Rubber Lined


Materials Carbon Steel / EPDM Rubber

Approvals Complies with MSS SP-58 & SP-69 (Type 12),
ASTM E-84 plenum rated

Recommended For use with PEX, CPVC and PVC pipe

Notes Green rubber lining formulated without plasticizers
Easy open/close locking system, inner lining is smooth
to allow for expansion and contraction. Patented
spacer washers allow for sliding or fixed hanger
positions

Easy-Close mechanism in this versatile EPDM rubber
lined clamp. Saves installation time and effort,
prevents vibration, noise, and metal to metal contact.
Temperature rating -40°F to 200°F

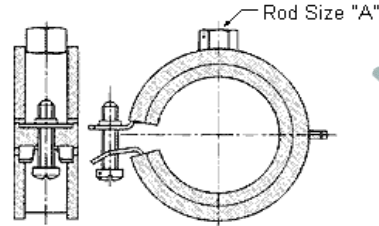

Metric (mm)	IP Size	Copper Tube Size	Rod Size " A"	Fa,z (lbs)	Box Qty	LBS/c
15-18	3/8	1/2	3/8	180	50	4.6
20-23	1/2	3/4	3/8	180	50	5.5
25-28	3/4	1	3/8	180	50	5.9
31-35	1	1 1/4	3/8	180	50	7.0
40-43	1 1/4	1 1/2	3/8	180	50	9.0
48-53	1 1/2	--	3/8	180	50	9.9
54-56	--	2	3/8	180	50	14.0
60-65	2	--	3/8	180	50	14.2
63	--	--	3/8	180	50	14.7
70-76	2 1/2	--	3/8	300	50	16.3
86-91	3	--	3/8	300	25	18.0
110-114	4*	--	3/8	300	25	24.4
124-132	*	--	1/2	500	25	30.0
155-160	*	--	1/2	500	10	36.0

* Note: Sizes vary between PVC and Metric pipes.

QWI 4.3.1 Issue Date Nov/21 Rev.10