

**TAYLOR****walraven**


# #24F Clevis Hanger Flat Top

**Finishes** Zinc Plated, Bare Metal

**Materials** Carbon Steel, Stainless Steel 304SS & 316SS

**Approvals** Complies with MSS SP-58 and SP-69 (Type 1).

**Recommended** Recommended for the suspension of non-insulated stationary pipe where space is limited.

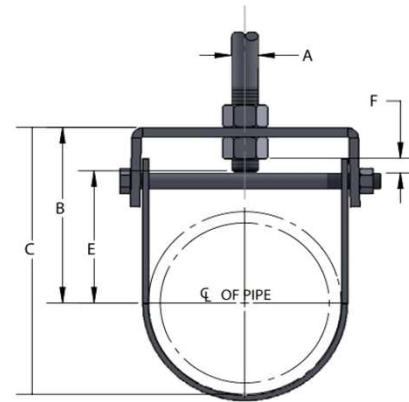

UPPER LOCKNUT MUST BE TIGHTENED SECURELY TO ASSURE  
PROPER HANGER PERFORMANCE

| IRON PIPE<br>SIZE | SPECIFICATION DATA |     |        |         |         |        | APP'X WT.<br>EACH<br>(LBS) | REC. MAX<br>LOAD<br>(LBS.) |
|-------------------|--------------------|-----|--------|---------|---------|--------|----------------------------|----------------------------|
|                   | BOLT               | A   | B      | C       | E       | F      |                            |                            |
| 1 1/2             | 1/4                | 3/8 | 2 1/8  | 3 1/8   | 1 5/16  | 5/16   | 0.42                       | 250                        |
| 2                 | 1/4                | 3/8 | 2 1/2  | 3 11/16 | 1 5/8   | 7/16   | 0.46                       | 300                        |
| 2 1/2             | 5/16               | 1/2 | 2 7/8  | 4 3/16  | 1 7/8   | 7/16   | 0.78                       | 500                        |
| 3                 | 5/16               | 1/2 | 3 5/8  | 5 3/8   | 2 9/16  | 1 1/16 | 0.98                       | 500                        |
| 3 1/2             | 5/16               | 1/2 | 4 1/16 | 6 1/16  | 2 15/16 | 3/4    | 1.36                       | 500                        |
| 4                 | 3/8                | 5/8 | 4 1/16 | 6 5/16  | 2 11/16 | 3/16   | 1.38                       | 700                        |
| 5                 | 1/2                | 5/8 | 4 7/8  | 7 5/8   | 3 1/2   | 5/8    | 2.08                       | 700                        |
| 6                 | 1/2                | 3/4 | 5 1/2  | 8 7/8   | 3 7/8   | 7/16   | 2.82                       | 900                        |
| 8                 | 5/8                | 3/4 | 6 3/8  | 10 7/8  | 4 5/8   | 5/16   | 4.34                       | 1000                       |
| 10                | 3/4                | 7/8 | 8 5/8  | 14      | 6 7/8   | 1 1/2  | 8.06                       | 1800                       |
| 12                | 3/4                | 7/8 | 9 5/8  | 16      | 7 5/8   | 2 9/16 | 18.05                      | 1800                       |

QWI 4.3.1 Issue Date June/25 Rev.1

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at [www.taylorwalraven.ca](http://www.taylorwalraven.ca)

For more information, please contact Customer Service at 1-800-263-8652