


#41PVC Swivel Ring Hanger - PVC Coated

Finishes Black PVC Coating c/w Zinc Insert Nut

Materials Carbon Steel

Approvals Complies with MSS SP-58 & SP-69 (Type 10).

Recommend for the suspension of insulated stationary glass pipe allowing for verticle adjustment.

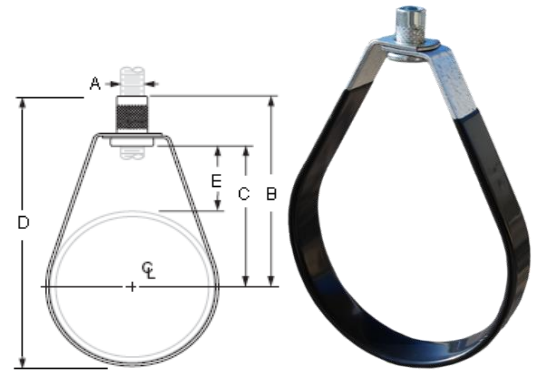

GLASS PIPE SIZE	SPECIFICATION DATA					REC. MAX. LOAD (LBS.)	APP'X WT. PER 100 (LBS)
	A	B	C	D	E		
1/2	3/8	2 1/2	1 5/8	2 15/16	1 13/16	400	08
3/4	3/8	2 7/16	1 9/16	2 15/16	1 1/16	400	08
1	3/8	2 9/16	1 11/16	3 1/4	1	400	08
1 1/4	3/8	2 1/2	1 5/8	3 5/16	13/16	400	10
1 1/2	3/8	3 3/16	2 1/8	4 1/8	1 3/16	400	11
2	3/8	3 7/16	2 7/16	4 5/8	1 1/4	400	13
2 1/2	3/8	3 3/16	2 15/16	5 1/2	1 1/2	600	31
3	3/8	4	3	5 3/4	1 1/4	600	31
4	3/8	4 3/4	3 3/4	7	1 1/2	600	38
5	1/2	5 7/8	4 7/8	8 5/8	2 1/8	1000	62
6	1/2	6 9/16	5 1/4	9 7/8	1 15/16	1250	96

QWI 4.3.1 Issue Date Nov/23 Rev.3

Note: when referencing a printed copy of this specification page, please insure it is the latest version as found on our website at www.taylorwalraven.ca

For more information, please contact Customer Service at 1-800-263-8652